# Modeling Vascular Diffusion of Oxygen in Breast Cancer

### Senior Project By Tina Giorgadze Advisors: Kerri-Ann Norton, Ethan Bloch

### Abstract

Oxygen is a vital nutrient necessary for tumor cells to survive and proliferate. It is diffused from our blood vessels into the tissue, where it is consumed by our cells. This process can be modeled by partial differential equations with sinks and sources. This project focuses on adding an oxygen diffusion module to an existing 3D agent-based model of breast cancer developed in Dr. Norton's lab. The module includes 2D and 3D partial differential equations (PDEs) and their numerical evaluations using the finite difference method. The vascular diffusion process occurred in four steps: 2D point source diffusion, 2D line source diffusion, 3D cubic patch diffusion, and vascular diffusion of oxygen.

$$\begin{bmatrix} U_{i,j,k,t+1} = U_{i,j,k,t} + \\ Dt \times \alpha \frac{U_{i+1,j,k,t} + U_{i-1,j,k,t} + U_{i,j+1,k,t} + U_{i,j-1,k,t} + U_{i,j,k+1,t} + U_{i,j,k-1,t} - 6U_{i,j,k,t}}{Dx^2} \end{bmatrix}$$

$$U(X,t)_t = \vec{\nabla}^2 U(X,t) + F(X,t)$$

Figure 1: Top: Approximation of the oxygen concentration matrix U at time step t+1 at 3D location i,j,k using the finite difference method Bottom: diffusion equation. U represents the quantity of oxygen at time t at location X. F is the supply/sink function

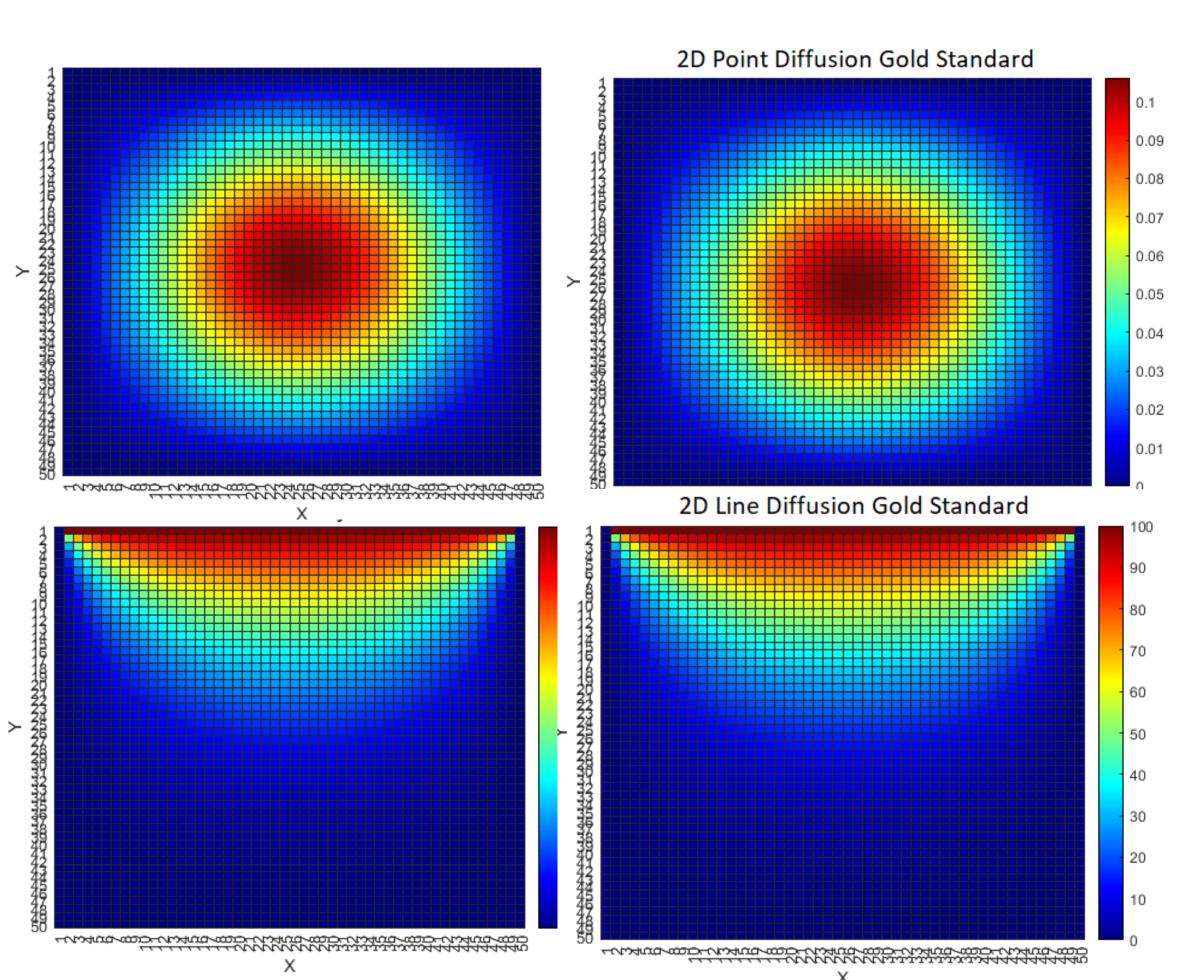


Figure 2: Left column: TG model of point-source diffusion (top) Point Source Diffusion Gold standard (bottom). Right column: TG model of line source diffusion (top) Line Source Diffusion Gold standard (bottom).

successful.

next (Figure 3)

sections in Figure 7

through the plane

(Figure 5)

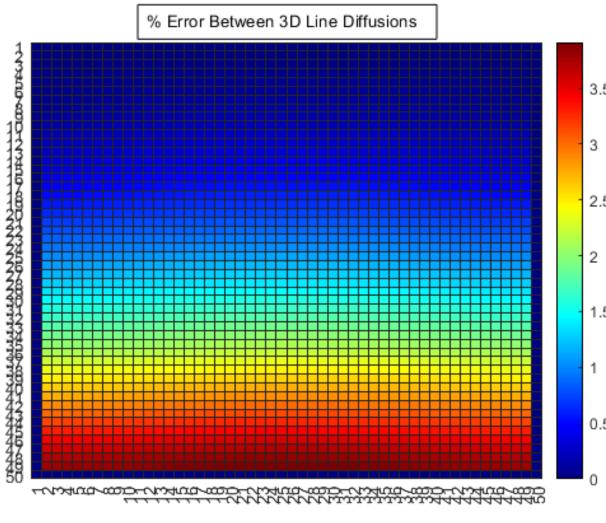


Figure 3: Error Map for 2D Line Diffusion

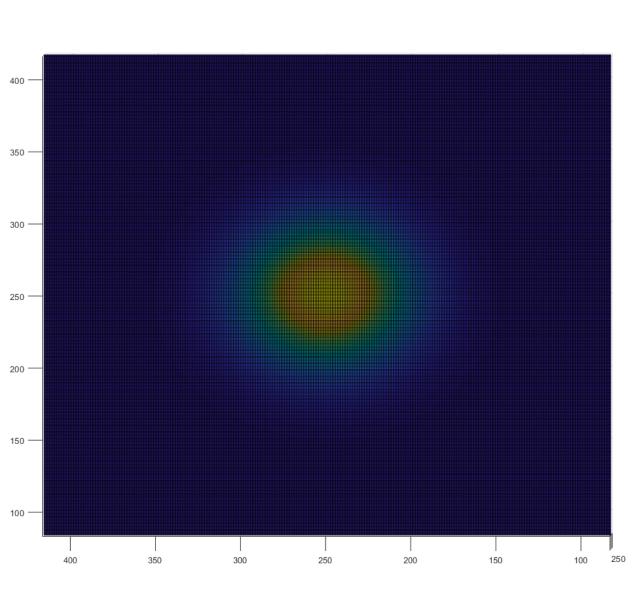


Figure 4: Diffusion radius of 100 microns

Results

Point source: Average error was under 0.4% (Figure 2)

O2 diffused equally in all three dimensions as a sphere

red blood vessels diffuse oxygen into the grid, see cross-

diffusion concentrations are highest where vessels cross

•The vascular diffusion of oxygen looks realistic (Figure 7)

This was due to buildup of error from one row to the

•Both 2D point source and line source diffusions were

Line source: Average error was 1.3% (Figure 2)

•Obtained diffusion radius of 100 microns (Figure 4)


3D cube source: Average error was 0.3%


•3D cubic patch diffusion was also successful.


- •Programmed 2D steady-state diffusion of a point source
  - supply rate of 100 nd units placed
- - computed error between my O2 matrix and "Gold Standard"
- •Programmed 3D diffusion of a cube source (7 x 7 x 7)

  - at center of a  $50 \times 50 \times 50$  grid
- •Programmed 3D vascular diffusion of oxygen

  - $500 \times 500 \times 500$  grid
- •All diffusions were modeled by a diffusion PDE, and evaluated numerically using

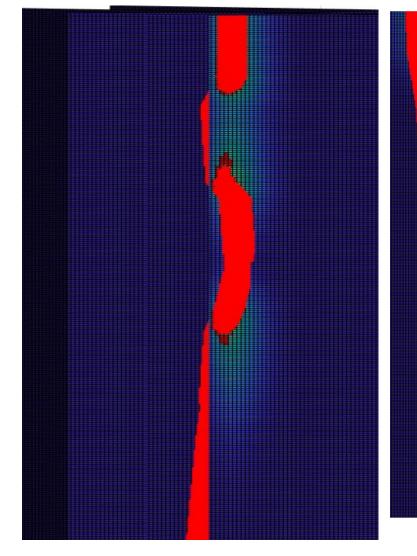

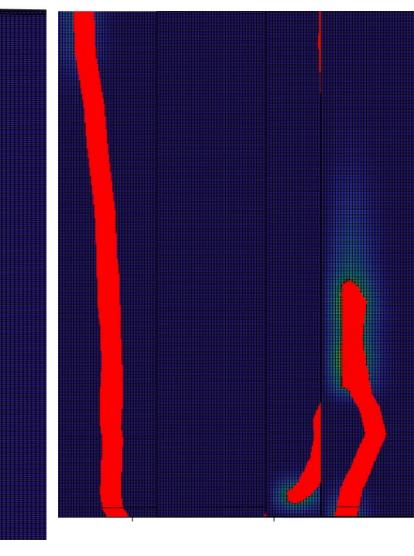

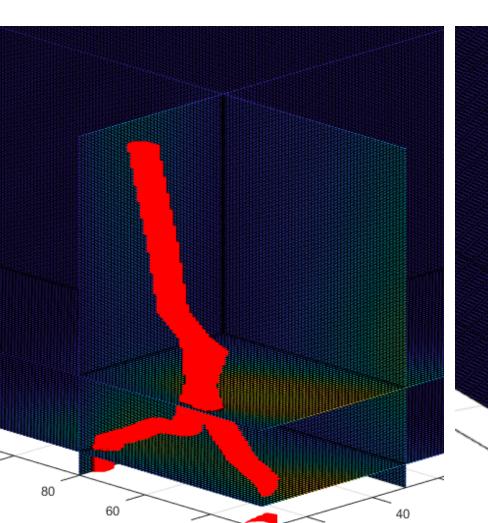

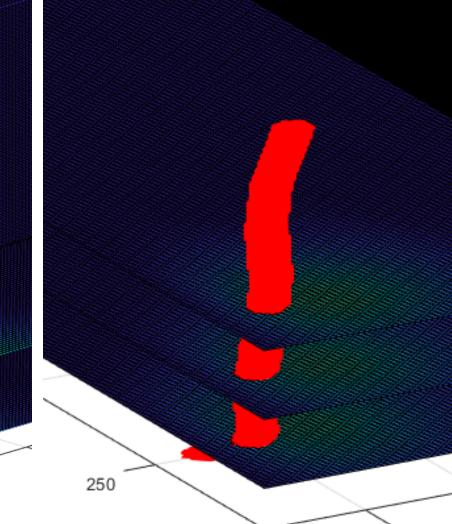


Figure 6: Initial Vasculature

Figure 5: Top: TG model slices of cubic patch

the gold standard

diffusion. Bottom: Cubic patch diffusion slices from

Figure 7: Four examples of vascular diffusion of oxygen

## Bibliography

- 1. Jana Gevertz, Zahra Aminzare, Kerri-Ann Norton, Judith P'erez-Vel'azquez, Alexandria Volkening, and Katarzyna A Rejniak, Emergence of anti-cancer drug resistance: exploring the importance of the microenvironmental niche via a spatial model, Applications of dynamical systems in biology and medicine, 2015, pp. 1–34.
- 2. Tina Giorgadze, Henning Fischel, Ansel Tessier, and Kerri-Ann Norton, Investigating Two Modes of Cancer-Associated Antigen Heterogeneity in an Agent-Based Model of Chimeric Antigen Receptor T-Cell Therapy, Cells 11 (2022), no. 19, 3165
- 3.Alex Pedcenko, 3D Heat equation solution with FD in MATLAB, 2023, https://github.com/aa3025/heat3d/ releases/tag/1.0.5.
- 4.G Nervadof, Solving 2D Heat Equation Numerically using Python, https://levelup.gitconnected.com/solving-2dheat-equation-numerically-using-python-3334004aa01a.

# Methods

- - at center of a  $50 \times 50$  grid
  - computed error between my O2 matrix and "Gold Standard"
- •Programmed 2D diffusion of line source
  - supply rate of 100 nd units
  - at top boundary of the  $50 \times 50$  grid
- •Obtained a diffusion radius in range 100-200 microns
- - supply rate of 1000

  - validated 3D patch diffusion using an existing 3D diffusion program
  - 8 blood vessels (Figure 6)
- Finite Difference Method approximations (Figure 1).